



Instructions

Dragon 3600 Fuel Pickup Adaptor Kit

Model F558

DRI-EAZ PRODUCTS, INC.

15180 Josh Wilson Road, Burlington, WA 98233

Phone: 800-932-3030 Fax: 360-757-7950 LegendBrandsCleaning.com

Adapts the Dragon 3600 Mobile Furnace for use with an external fuel tank.

Patents: <http://www.LBpatents.com>

READ AND SAVE THESE INSTRUCTIONS

TOOLS REQUIRED:

One 7/16 in. wrench

Two 9/16 in. wrenches



Clean cloths to clean up spills.

KIT INCLUDES

- A. Fuel intake adaptor hose with female coupling
- B. Male coupler for fuel return hose
- C. Fuel intake coupling
- D. Fuel return coupling

Fittings C and D come with Teflon thread sealing tape already applied. Before installing the fitting, inspect tape to ensure it has not come loose from threads during shipping and handling.

- E. Fuel pickup assembly

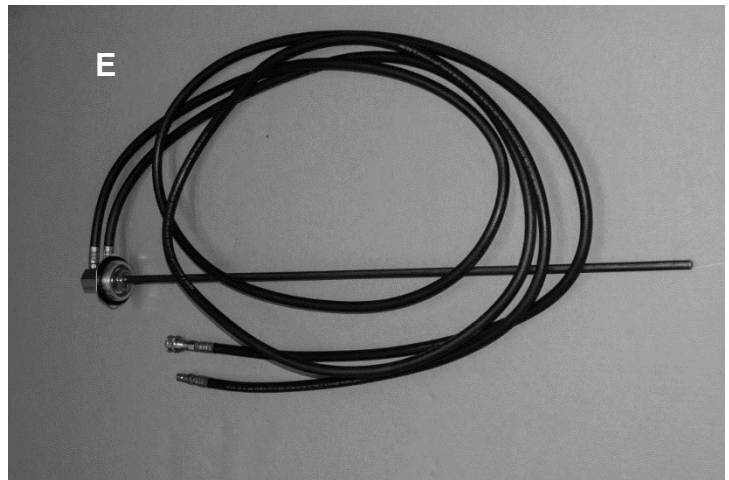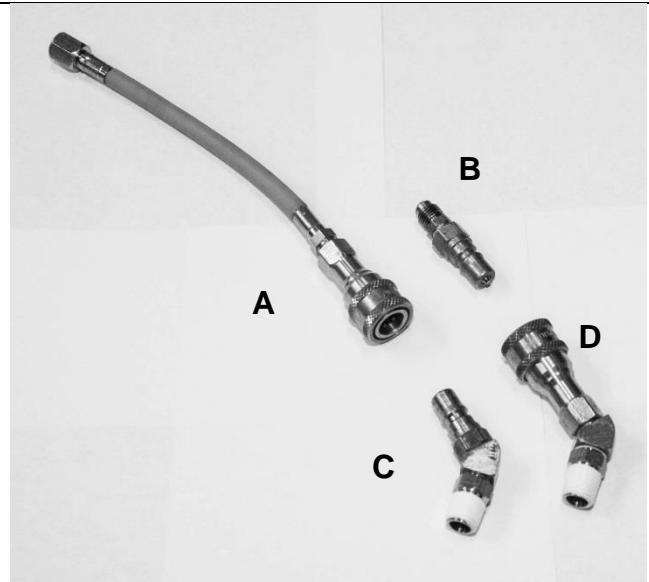

INSTALLATION

Place cloths (not shown) under hoses and fittings to absorb any accidental spills.

IMPORTANT: Loosen or remove fuel cap to release any pressure in the fuel line or tank.


Remove fuel intake hose assembly from fuel filter bracket.

Note: Do not remove fitting on fuel filter bracket. Use two 9/16 in. wrenches to keep fitting on bracket in place.

Remove fuel hose and discard.




Using two 9/16 in. wrenches, remove fuel intake hose (E) and fuel return hose (F) from tank fittings.

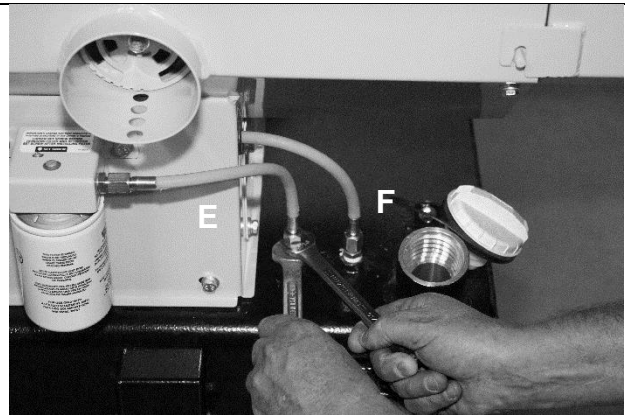

Attach new fuel hose assembly (A) to fuel filter bracket. Do not overtighten.



**Remove the two fuel hose fittings from tank.
Discard fittings.**

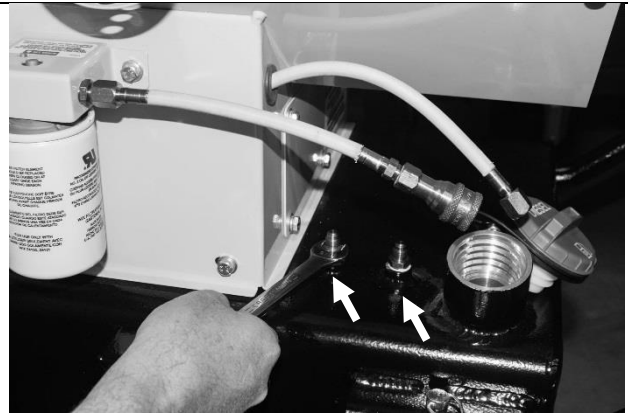


Ensure fittings are properly threaded before tightening. Install fuel intake side/female coupling (C) assembly first, then install the fuel return side/male coupling assembly (D).

TIGHTEN APPROXIMATELY TWO FULL TURNS ONLY. DO NOT OVERTIGHTEN. Orient the couplings to point outward, away from fuel tank body.



Use 7/16 in. and 9/16 in. wrenches to install the female coupling (B) to the fuel return hose. Do not overtighten.

Reinstall fuel cap

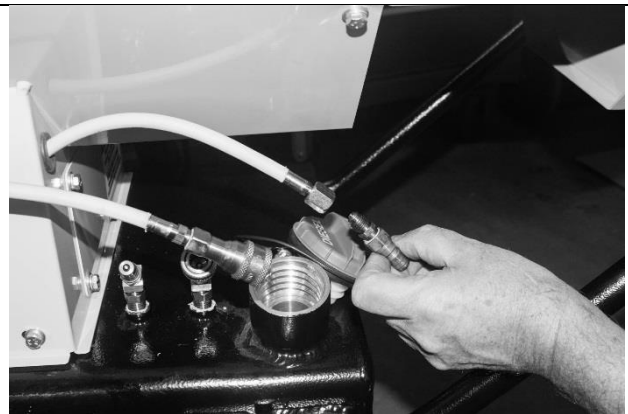

To install fuel pickup on external fuel tank, remove tank cap and insert fuel pickup tube.

Use a large adjustable-end wrench to tighten pickup into threaded tank cap opening. Do not overtighten.




Install fuel pickup fuel hoses to the appropriate couplings at the furnace.

Hold the grommet in place when positioning the fuel return hose (see arrow).

Be sure external fuel hoses are laid out flat and do not twist or pull on the fittings on either end.

The Dragon 3600 is now ready for use with the external fuel tank.

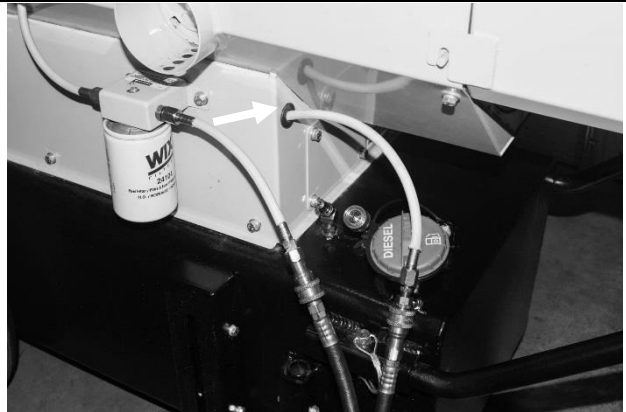

To restore the Dragon for onboard tank use, uncouple the fuel pickup from the Dragon and attach the fuel hoses to the appropriate fittings on the tank as shown.



WARNING: This product and other substances that may become airborne from its use contain chemicals, including lead, known to the State of California to cause cancer, birth defects, or other reproductive harm. For more information, go to P65Warnings.ca.gov